


TRACK REFURBISHMENT  
ESSEX HIGH SCHOOL  
TAPPAHANNOCK COUNTY, VIRGINIA  
APN 49566

ADDENDUM #1  
FEBRUARY 18, 2022

Please take note of the following modifications to the Contract Documents:

1. Drawing C2.00 directs contractor to “remove asphalt pad” which is the high jump area next to the baseball field. This shall be revised to “**crack seal and overlay with 1.5” of surface asphalt**”. The area is approximately 5,200 square feet.
2. Drawing C2.00 directs contractor to “remove existing fence & curb” on visitor side of the field. This shall be revised to “**remove existing curb**”. The Owner will remove the fence on the visitor side for future reuse at the school.
3. Drawing C2.00 has a note that states: “The Owner’s irrigation contractor will relocate the irrigation system as necessary...”. This shall be revised to “**Contractor shall relocate irrigation system as necessary to construct the track while still providing adequate irrigation coverage of the field.**”
4. Attached is a wiring diagram for the Musco stadium lights that were installed a couple years ago. This information is being provided to help avoid damaging those lines during construction.
5. At two locations (1. near the existing scoreboard and 2. at the start/finish line) **install 2” PVC conduit for future scoreboard wiring and timing equipment.**
6. Please take note of the following approved substitutions for MAXFLEX BL as manufactured and installed by Precision Athletics:
  - a. Plexitrac Lightning as manufactured by ICP Building Solutions Group.
7. The Pre-bid Meeting attendance list is attached.

TRACK REFURBISHMENT  
ESSEX HIGH SCHOOL  
TAPPAHANNOCK COUNTY, VIRGINIA  
APN 49566

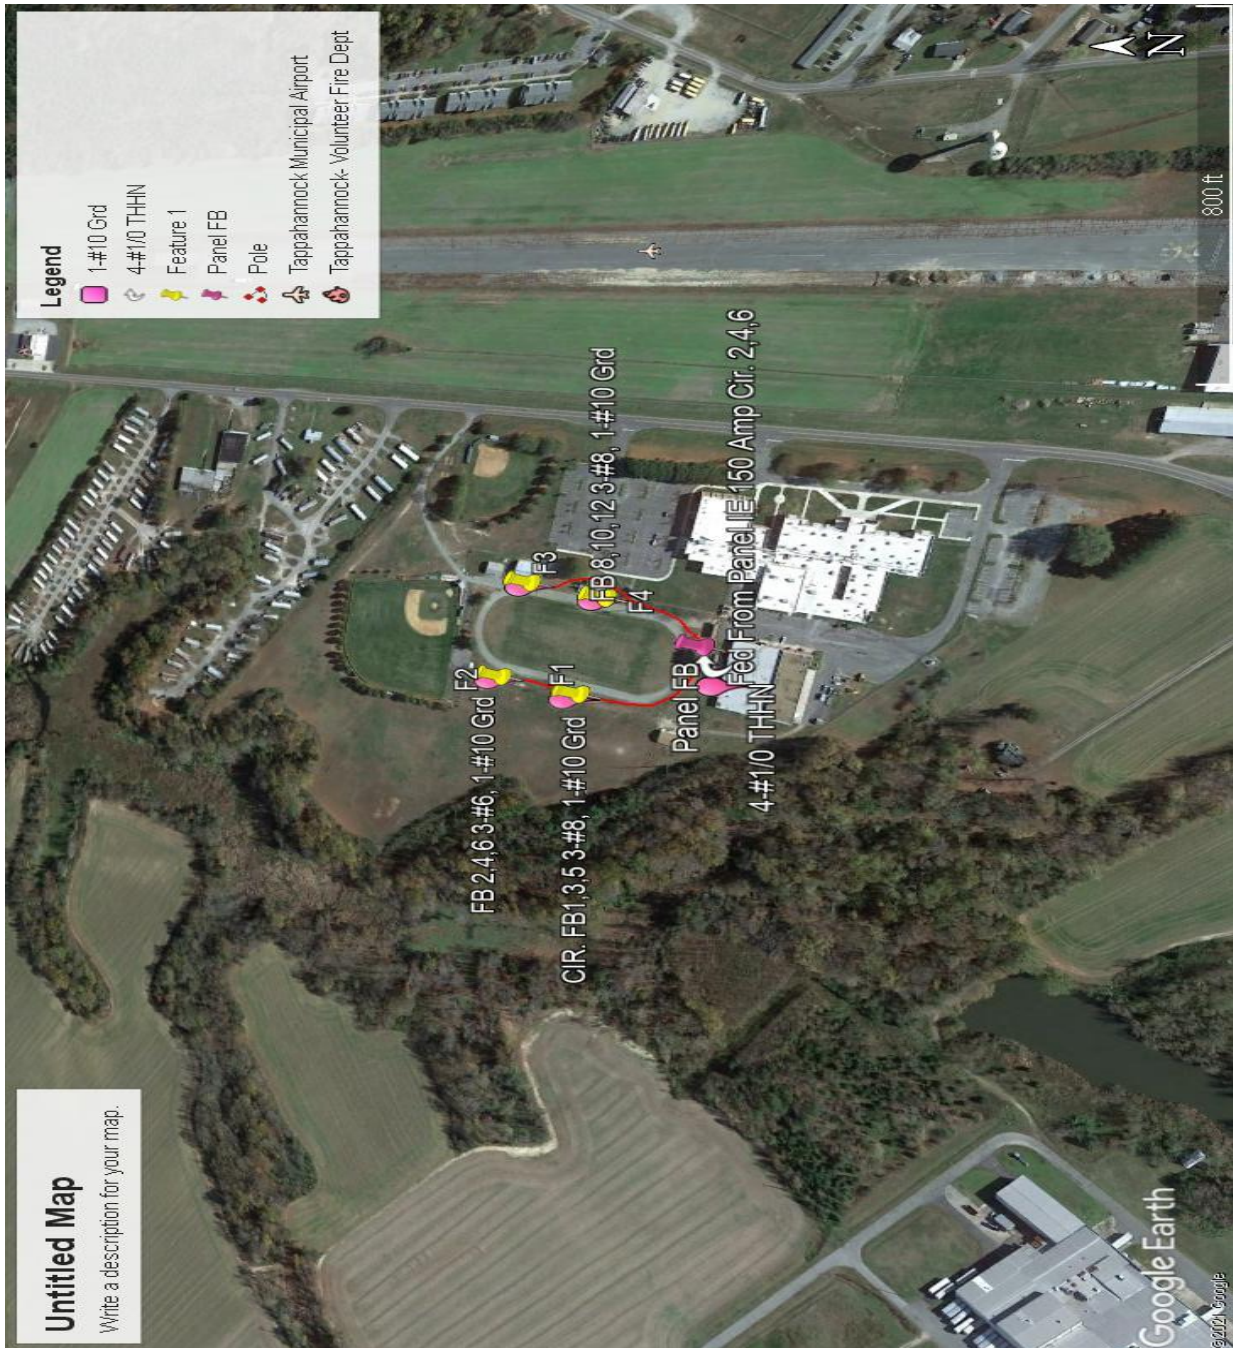

If the lighting is turned on it will be easier for any utility marking company to pick up the 60 hz. We also should have red marking tape in our ditches.

